TRAYSEALING

THOUGHT & DESIGN FOR YOU

by MECAPACK

TRAYSEALER O² 1500

WORKSTATION

TOOLING COMPATIBILITY

TO O² 2500

+ FIABILITY
+ COMPATIBILITY
+ ADAPTABILITY

MECAPACK
ZI de Montifaut
85700 Pouzauges - FRANCE
Tel : + 33 2 52 61 47 89
EMail : sales.admin@mecapack.com

www.mecapack.com

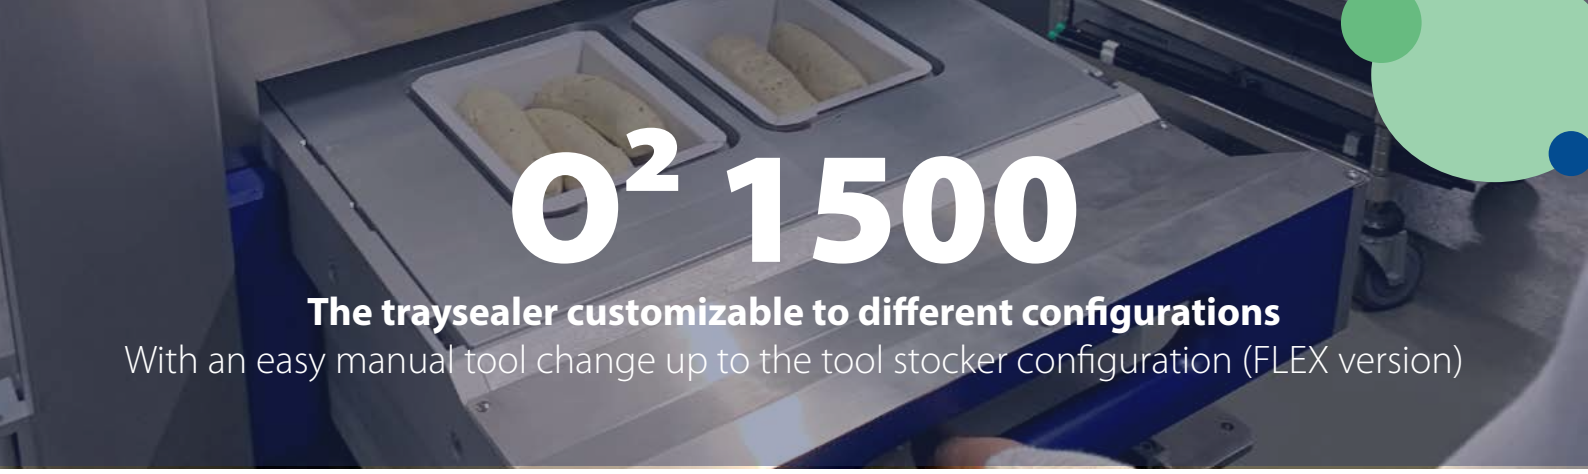

O² 1500

The traysealer customizable to different configurations

With an easy manual tool change up to the tool stocker configuration (FLEX version)

HIGHLIGHT :

- Semi automatic or workstation traysealer
- Ergonomic and full cleanable design
- **FLEX version with integrated tool stocker (up to 3 tools)**
- STD version with quick tool change (10min)
- Tool compatibility with automatic traysealer O²2500
- Pneumatical sealing station with mechanical locking by rod

DIMENSION :

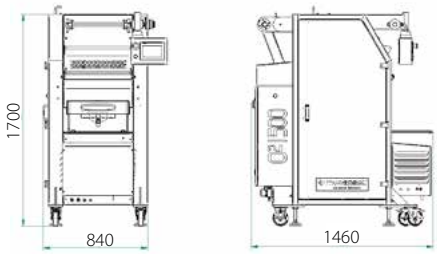

INDICATIVE TRAY DIMENSION :

Pocket number	1	2	3	4
Lenght (mm)	420	325	325	325
Width (mm)	325	200	125	90
Hight (mm)	130	130	130	130

INDICATIVE TRAY DIMENSION :

Pocket number	2x1	2x2	2x3	2x4
Lenght (mm)	420	200	140	125
Width (mm)	140	140	125	90
Hight (mm)	130	130	130	130

ENERGY :

Elec. : 3x400V+N+T – 8KW or 3x 220V+N+T – 9.2KW
Pneu : 15m3/h at 6 bars
Water : 50L/h (integrated cooling unit in option)

PROCESS :

Sealing | Vaacum and gas | Skin

SPEED :

Up to : 6 cpm

OPTION :

FLEX Machine configuration with integrated tool stocker | STD machine version with openable top tool | Automatic on station option with servodrived | Automatic on station option with servodrived machine drawer | Integrated cooling unit | Spoted printed film | ...

SECTORS:

This document and its content have non-contractual values

MECAPACK
ZI de Montifaut
85700 Pouzauges - FRANCE
Tel : + 33 2 52 61 47 89
EMail : sales.admin@mecapack.com

www.mecapack.com