

TRAYSEALING THOUGHT & DESIGNED FOR YOU

by **MECAPACK**

TRAYSEALER O² 5000 AUTOMATIC



- + EFFICACITY
- + FLEXIBILITY
- + ERGONOMIE
- + INTELLIGENCE
MOTION

O²5000


The flexible traysealer for your productions

HIGHLIGHT :

- Compact machine, full servo-driven configuration with MECAPACK Intelligent Motion or pneumatical configuration
- Continuous process or step by step compatibility
- Energy consumption optimisation with IM version
- Simple and reliable configuration
- Single and/or double lane configuration
- Full cleanable and openable design
- Full accessibility to the equipment (conveyors, vacuum valve, lifting station, arms...)
- Sealing station with mechanical locking by rod
- Up and downstream MECAPACK design solution (denester, conveyor, top lid...)
- Several tray batch preparation solution possibilities (belt, stopper, customized beam conveyor)

Vacuum and gas configuration with
ECOGAZ kit

DIMENSION :

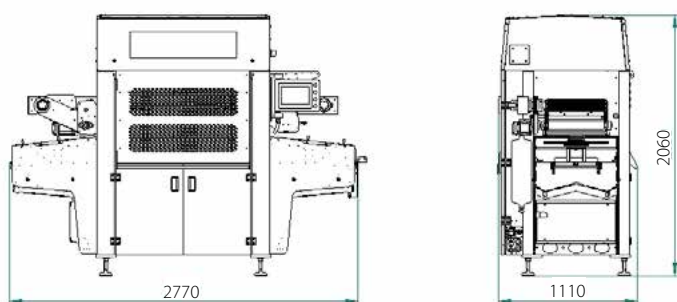

ENERGY :

Elec. : 8 at 15 KW

Pneu : 3m³/h at 6 bars

Water : 100L/h (integrated cooling unit in option)

PROCESS :

Sealing | Vacuum and gas | Skin

SPEED :

Up to : 25 cpm

OPTION :

Vacuum and gas configuration with ECOGAZ configuration | Cooling unit | Spotted printed film | Preheating top film station for SKIN application | Tray automatic and integrated denester | Up and downstream MECAPACK conveyor solutions | Integrated printing solution | Automatic filling solution | Integrated tray inliner | Top lid system

INDICATIVE TRAY DIMENSION :

Pocket number	1	2	3	4
Lenght (mm)	515	340	340	340
Width (mm)	340	245	155	110
Hight (mm)	100	100	100	100

SECTORS :

